



Description

Mi-Wave's 582 Series Sliding Matched load consists micrometer drive. The load is machined to precise tolerances to permit the close fit necessary for sliding without binding.


- *Low VSWR*
- *Precision Adjustment*

Applications


The 582 Series Sliding matched loads are designed for use in test and development sets where low VSWR is being measured. By changing the position of the sliding load, the test engineer can determine a minimum/maximum VSWR due to the phasing between the VSWR of the load and VSWR of the unit under test.

This min/max VSWR is used to determine the true VSWR of the unit under test. The 585 Series loads are also used to measure coupler directivity and residual VSWR in slotted line or other reflection measuring devices.

Dimensional Specifications		
Model No.	A	
	in.	mm
585Ku	3.88	98.6
585K	2.88	73.2
585A	2.43	61.7
585B	2.43	61.7
585U	2.43	61.7
585V	2.00	50.8
585E	2.00	50.8
585W	2.00	50.8
585F	1.38	35.1
585D	1.38	35.1
585G	1.38	35.1

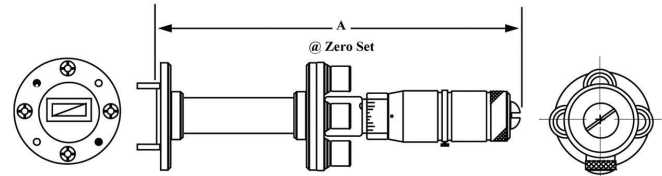

Ordering Information

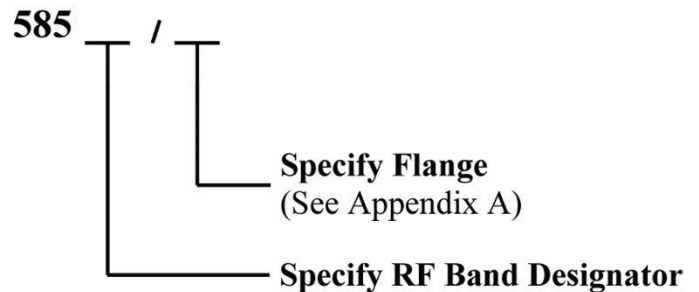

* Consult Mi-wave for current dimensions

Technical Specifications (typical)											
Model No.	585Ku	585K	585A	585B	585U	585V	585E	585W	585F	585D	585G
Frequency Band (GHz)	12.4–18.0	18.0–26.5	26.5–40.0	33.0–50.0	40.0–60.0	50.0–75.0	60.0–90.0	75.0–110.0	90.0–140.0	110.0–170.0	140–220
VSWR	1.05	1.05	1.05	1.05	1.05	1.06	1.06	1.08	1.08	1.08	1.10
Average Power (Watts)	1.0	1.0	1.0	5.0	0.7	0.3	0.3	0.2	0.1	0.1	0.1
Weight (oz)	3.0	3.0	3.0	2.0	2.0	2.0	2.0	1.5	1.5	1.5	1.5