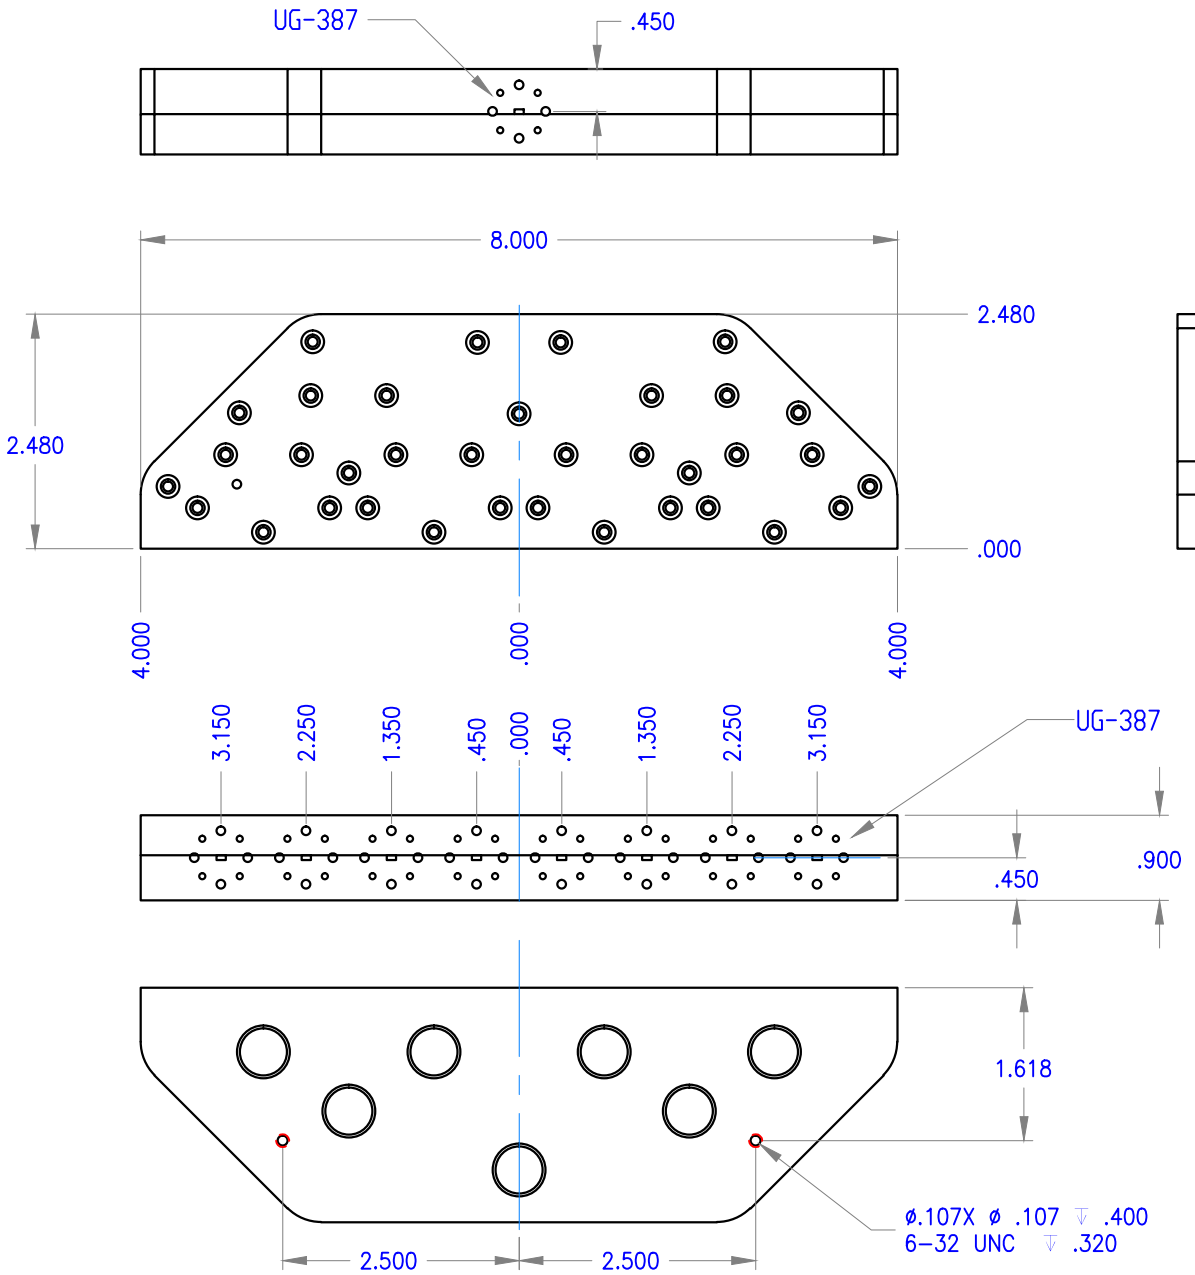

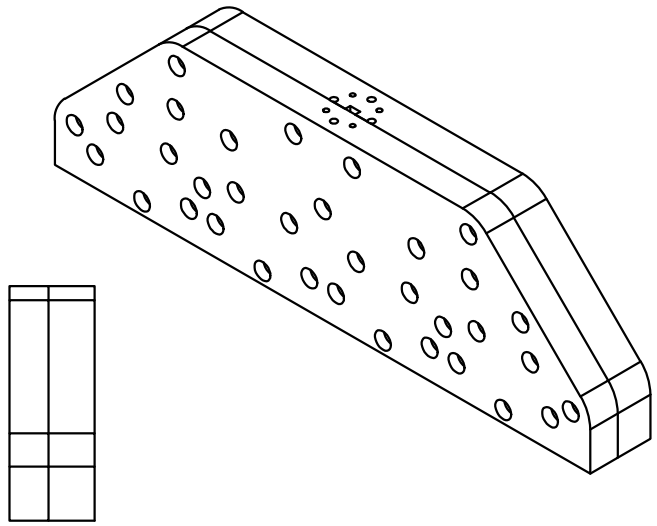

INSERTION LOSS: 2.5 dB typical
VSWR: 1.4:1 typical
ISOLATION: 20 dB min 25 dB nom
PHASE BALANCE: < 20 degrees typical

DECIMALS: XXXX ±.0005 XXX ±.005 XX ±.01		NAME	DATE
ANGLES: ± .5 DEGRESS	DRAWN	JV	6-15-15
THIRD ANGLE PROJECTION	CHECKED	MS	6-15-15
	ENG	MS	6-15-15
	MATL: 1/2 HARD BRASS		

TITLE: Mi-Wave Millimeter Products Inc.

SIZE A | DWG. NO. 608W-387 POWER DIVIDER OUTLINE_22885 | REV

SCALE: 1:2 | WEIGHT: | SHEET 1 OF 1